


**50 NORTH-REFLECTED CEILING PLAN**

0 4 8  
SCALE IN FEET

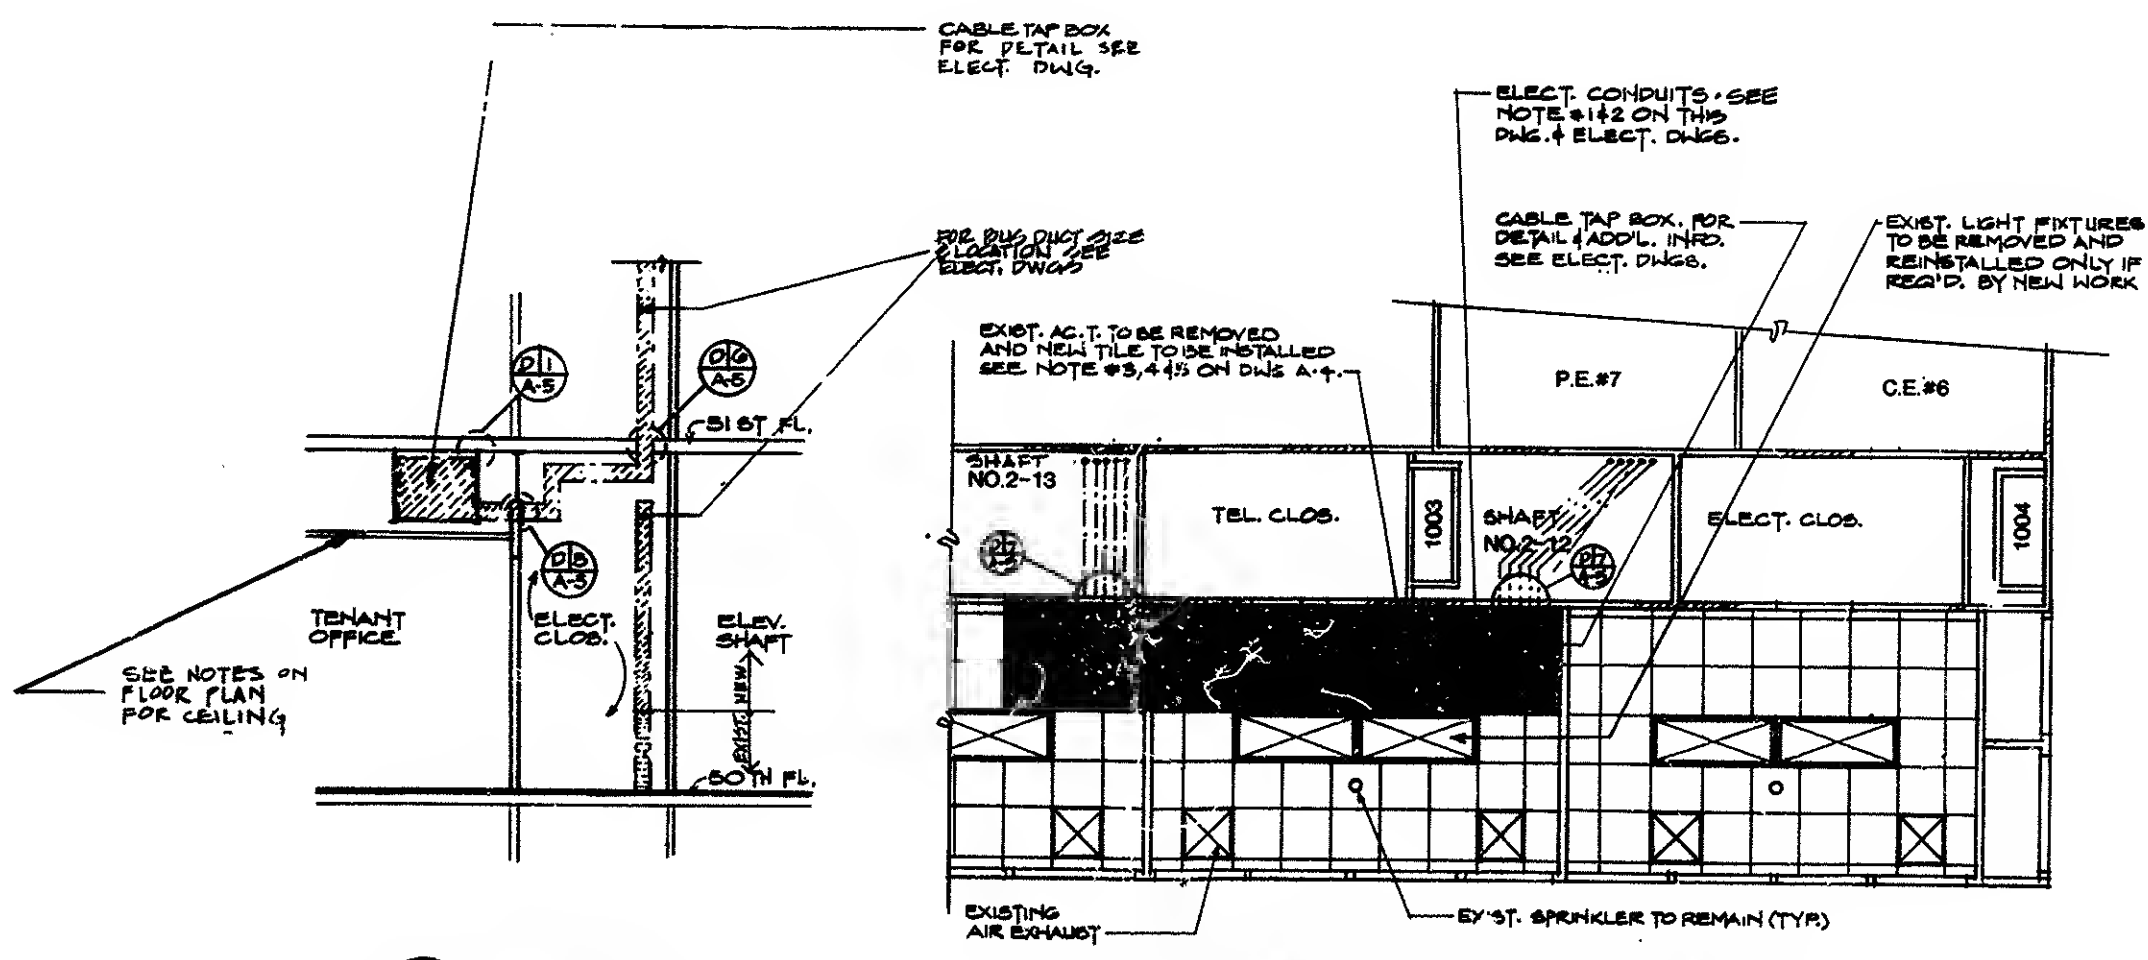

**S1 SECTION A-4**

0 4 8  
SCALE IN FEET

**48 SOUTH-REFLECTED CEILING PLAN**

0 4 8  
SCALE IN FEET

**TYPICAL NOTES**

1. FOR EXACT ELECTRICAL CONDUITS & BUS DUCT LOCATIONS AND DETAILS SEE ELECTRICAL DRAWINGS.
2. THE CONTRACTOR SHALL PROVIDE METAL BRACKETS AS REQUIRED TO HOLD IN PLACE THE ELECTRICAL CONDUITS TO WALLS AND CEILINGS.
3. THE CONTRACTOR SHALL REMOVE AND RESTORE PORTION OF EXISTING CEILING INCLUDING GRID/SHOWN ON DRAWINGS AS REQUIRED FOR THE INSTALLATION OF NEW ELECTRICAL WORK. ALL DAMAGED GRID SYSTEM, SUPPORTS AND DEFECTIVE SPLINE SHALL BE REPLACED AS REQUIRED. NEW A.C. TILE TO BE INSTALLED TO MATCH EXISTING MATERIAL IN TEXTURE, COLOR & TYPE AT THE CONTRACTOR'S EXPENSE.
4. THE CONTRACTOR SHALL ALIGN ALL THE REPLACED ACOUSTICAL TILE TO THE EXISTING TILES THAT REMAIN ON CONSTRUCTION AS SHOWN ON PLAN.
5. EXISTING LIGHT FIXTURES SHALL BE REMOVED AND RE-INSTALLED. SEE LIGHT FIXTURE LEGEND ON DWG. #A-3. SEE ELECTRICAL DWGS FOR INSTALLATION.

SOUTH SIDE AREA OF WORK

KEY NO S